## A CLASS CARRIAGE — XR619 — COMPACT ROLLER BOOM


**6,000 LBS CAPACITY**
**19 FT LIFT HEIGHT**
**74 HP**

FIXED CARRIAGE*

| | |
|---|---|
| Capacity | 6,000 lbs |
| Max. lift height | 19' |
| Forward reach | 11' |
| Frame leveling L/R | N/A |
| Weight | 10,300 lbs* |
| Engine (Deutz 2.9L) | 74 hp (Tier 4F) |
| Fuel capacity | 17 gal |
| Tires | Pneumatic 12.00 x 16.5 |
| GPM | 26 |
| PSI | 3,200 |
| Hydraulic oil capacity | 24 gal |
| Length to fork face | 12' 7" |
| Width | 71" |
| Height | 6' 5" |
| Wheel base | 93" |
| Ground clearance | 10.8" |
| Turning radius | 11' |
| Warranty | Xtreme 10-5-2 |




*PRELIMINARY SPECIFICATIONS. CONFIRM AT TIME OF ORDERING.

## B CLASS CARRIAGE — XR742 — HIGH PIVOT ROLLER BOOM


**7,000 LBS CAPACITY**
**42 FT LIFT HEIGHT**
**74 HP HT** OPTIONAL 120 HP

FIXED CARRIAGE*

| | |
|---|---|
| Capacity | 7,000 lbs |
| Max. lift height | 42' |
| Forward reach | 26' 11" |
| Frame leveling L/R | 11° |
| Weight | 27,000 lbs* |
| Engine (Cummins 3.8L) | 74 hp HT (Tier 4F) |
| Fuel capacity | 50 gal |
| Tires | Foam Filled 15.5 x 25 |
| GPM | 49 |
| PSI | 3,500 |
| Hydraulic oil capacity | 62 gal |
| Length to fork face | 20' 10" |
| Width | 101" |
| Height | 8' |
| Wheel base | 125" |
| Ground clearance | 16.5" |
| Turning radius | 12' |
| Warranty | Xtreme 10-5-2 |




*PRELIMINARY SPECIFICATIONS. CONFIRM AT TIME OF ORDERING.

## B CLASS CARRIAGE — XR944 — HIGH PIVOT ROLLER BOOM


**9,000 LBS CAPACITY**
**44 FT LIFT HEIGHT**
**74 HP HT** OPTIONAL 120 HP

FIXED CARRIAGE*

| | |
|---|---|
| Capacity | 9,000 lbs |
| Max. lift height | 44' |
| Forward reach | 28' 10" |
| Frame leveling L/R | 11° |
| Weight | 28,700 lbs* |
| Engine (Cummins 3.8L) | 74 hp HT (Tier 4F) |
| Fuel capacity | 50 gal |
| Tires | Foam Filled 15.5 x 25 |
| GPM | 49 |
| PSI | 3,500 |
| Hydraulic oil capacity | 62 gal |
| Length to fork face | 21' |
| Width | 101" |
| Height | 8' |
| Wheel base | 125" |
| Ground clearance | 16.5" |
| Turning radius | 12' |
| Warranty | Xtreme 10-5-2 |




*PRELIMINARY SPECIFICATIONS. CONFIRM AT TIME OF ORDERING.

## B CLASS CARRIAGE — XR1055 — HIGH PIVOT ROLLER BOOM

**10,000 LBS CAPACITY**
**55 FT LIFT HEIGHT**
**74 HP HT** OPTIONAL 120 HP

FIXED CARRIAGE (OUTRIGGERS DOWN)

| | |
|---|---|
| Capacity | 10,000 lbs |
| Max. lift height | 55' |
| Forward reach | 39' |
| Frame leveling L/R | 11° |
| Weight | 34,600 lbs |
| Engine (Cummins 3.8L) | 74 hp HT (Tier 4F) |
| Fuel capacity | 50 gal |
| Tires | Foam Filled 15.5 x 25 |
| GPM | 49 |
| PSI | 3,500 |
| Hydraulic oil capacity | 62 gal |
| Length to fork face | 21' 4" |
| Width | 101" |
| Height | 8' 9" |
| Wheel base | 125" |
| Ground clearance | 17.75" |
| Turning radius | 12' |
| Warranty | Xtreme 10-5-2 |




## B CLASS CARRIAGE — XR1147 — HIGH PIVOT ROLLER BOOM

**11,000 LBS CAPACITY**
**47 FT LIFT HEIGHT**
**74 HP HT** OPTIONAL 120 HP

FIXED CARRIAGE

| | |
|---|---|
| Capacity | 11,000 lbs |
| Max. lift height | 47' |
| Forward reach | 31' 6" |
| Frame leveling L/R | 11° |
| Weight | 30,610 lbs |
| Engine (Cummins 3.8L) | 74 hp HT (Tier 4F) |
| Fuel capacity | 50 gal |
| Tires | Foam Filled 13.00 x 24 |
| GPM | 49 |
| PSI | 3,500 |
| Hydraulic oil capacity | 62 gal |
| Length to fork face | 21' 3" |
| Width | 101" |
| Height | 8' 1" |
| Wheel base | 125" |
| Ground clearance | 16.5" |
| Turning radius | 12' 5" |
| Warranty | Xtreme 10-5-2 |




## B CLASS CARRIAGE — XR1245 — HIGH PIVOT ROLLER BOOM

**12,000 LBS CAPACITY**
**45 FT LIFT HEIGHT**
**120 HP**

FIXED CARRIAGE (OUTRIGGERS DOWN)

| | |
|---|---|
| Capacity | 12,000 lbs |
| Max. lift height | 45' |
| Forward reach | 30' 4" |
| Frame leveling L/R | 11° |
| Weight | 34,380 lbs |
| Engine (Cummins 3.8L) | 120 hp (Tier 4F) |
| Fuel capacity | 68 gal |
| Tires | Foam Filled 15.5 x 25 |
| GPM | 49 |
| PSI | 3,500 |
| Hydraulic oil capacity | 58 gal |
| Length to fork face | 22' 7" |
| Width | 102" |
| Height | 8' 1" |
| Wheel base | 124" |
| Ground clearance | 16.5" |
| Turning radius | 12' 2" |
| Warranty | Xtreme 10-5-2 |




## B CLASS CARRIAGE — XR1255 — HIGH PIVOT ROLLER BOOM

**12,000 LBS CAPACITY**
**55 FT LIFT HEIGHT**
**120 HP**

FIXED CARRIAGE (OUTRIGGERS DOWN)

| | |
|---|---|
| Capacity | 12,000 lbs |
| Max. lift height | 55' |
| Forward reach | 38' |
| Frame leveling L/R | 11° |
| Weight | 37,500 lbs |
| Engine (Cummins 3.8L) | 120 hp (Tier 4F) |
| Fuel capacity | 68 gal |
| Tires | Foam Filled 15.5 x 25 |
| GPM | 49 |
| PSI | 3,500 |
| Hydraulic oil capacity | 58 gal |
| Length to fork face | 24' 8" |
| Width | 102" |
| Height | 8' 1" |
| Wheel base | 141" |
| Ground clearance | 16.5" |
| Turning radius | 14' |
| Warranty | Xtreme 10-5-2 |




## C CLASS CARRIAGE — XR1534 — HIGH CAPACITY ROLLER BOOM

**15,000 LBS CAPACITY**
**34 FT LIFT HEIGHT**
**120 HP**

FIXED CARRIAGE

| | |
|---|---|
| Capacity | 15,000 lbs |
| Max. lift height | 34' |
| Forward reach | 17' |
| Frame leveling L/R | 11° |
| Weight | 32,480 lbs |
| Engine (Cummins 3.8L) | 120 hp (Tier 4F) |
| Fuel capacity | 68 gal |
| Tires | Foam Filled 15.5 x 25 |
| GPM | 49 |
| PSI | 4,300 |
| Hydraulic oil capacity | 58 gal |
| Length to fork face | 22' |
| Width | 102" |
| Height | 8' 11" |
| Wheel base | 124" |
| Ground clearance | 16.5" |
| Turning radius | 12' 2" |
| Warranty | Xtreme 10-5-2 |




## C CLASS CARRIAGE — XR1570 — HIGH CAPACITY ROLLER BOOM

**15,000 LBS CAPACITY**
**70 FT LIFT HEIGHT**
**134 HP**

FIXED CARRIAGE (OUTRIGGERS DOWN)

| | |
|---|---|
| Capacity | 15,000 lbs |
| Max. lift height | 70' |
| Forward reach | 53' 10" |
| Frame leveling L/R | 8° |
| Weight | 48,480 lbs |
| Engine (Deutz 3.6L) | 134 hp (Tier 4F) |
| Fuel capacity | 72 gal |
| Tires | Foam Filled 17.5 x 25 |
| GPM | 49 |
| PSI | 4,000 |
| Hydraulic oil capacity | 58 gal |
| Length to fork face | 26' 6" |
| Width | 102" |
| Height | 8' 11" |
| Wheel base | 147" |
| Ground clearance | 15" |
| Turning radius | 15' 10" |
| Warranty | Xtreme 10-5-2 |




## C CLASS CARRIAGE — XR2034 — HIGH CAPACITY ROLLER BOOM

**20,000 LBS CAPACITY**
**34 FT LIFT HEIGHT**
**134 HP**

FORK POSITIONING CARRIAGE

| | |
|---|---|
| Capacity | 20,000 lbs |
| Max. lift height | 34' |
| Forward reach | 16' 7" |
| Frame leveling L/R | 8° |
| Weight | 41,450 lbs |
| Engine (Deutz 3.6L) | 134 hp (Tier 4F) |
| Fuel capacity | 72 gal |
| Tires | Foam Filled 17.5 x 25 |
| GPM | 49 |
| PSI | 4,000 |
| Hydraulic oil capacity | 58 gal |
| Length to fork face | 22' 1" |
| Width | 102" |
| Height | 8' 11" |
| Wheel base | 147" |
| Ground clearance | 15" |
| Turning radius | 15' 10" |
| Warranty | Xtreme 10-5-2 |




## C CLASS CARRIAGE — XR2042 — HIGH CAPACITY ROLLER BOOM

**20,000 LBS CAPACITY**
**42 FT LIFT HEIGHT**
**134 HP**

FIXED CARRIAGE

| | |
|---|---|
| Capacity | 20,000 lbs |
| Max. lift height | 42' |
| Forward reach | 24' 10" |
| Frame leveling L/R | 8° |
| Weight | 42,820 lbs |
| Engine (Deutz 3.6L) | 134 hp (Tier 4F) |
| Fuel capacity | 72 gal |
| Tires | Foam Filled 17.5 x 25 |
| GPM | 49 |
| PSI | 4,000 |
| Hydraulic oil capacity | 58 gal |
| Length to fork face | 26' 1" |
| Width | 102" |
| Height | 8' 11" |
| Wheel base | 147" |
| Ground clearance | 15" |
| Turning radius | 15' 10" |
| Warranty | Xtreme 10-5-2 |




## C CLASS CARRIAGE — XR2045 — HIGH CAPACITY ROLLER BOOM

**20,000 LBS CAPACITY**
**45 FT LIFT HEIGHT**
**134 HP**

FIXED CARRIAGE (OUTRIGGERS DOWN)

| | |
|---|---|
| Capacity | 20,000 lbs |
| Max. lift height | 45' |
| Forward reach | 27' 4" |
| Frame leveling L/R | 8° |
| Weight | 46,300 lbs |
| Engine (Deutz 3.6L) | 134 hp (Tier 4F) |
| Fuel capacity | 72 gal |
| Tires | Foam Filled 17.5 x 25 |
| GPM | 49 |
| PSI | 4,000 |
| Hydraulic oil capacity | 58 gal |
| Length to fork face | 22' 6" |
| Width | 102" |
| Height | 8' 11" |
| Wheel base | 147" |
| Ground clearance | 15" |
| Turning radius | 15' 10" |
| Warranty | Xtreme 10-5-2 |




## D CLASS CARRIAGE — XR2450 — ULTRA HIGH CAPACITY ROLLER BOOM

**24,000 LBS CAPACITY**
**50 FT LIFT HEIGHT**
**173 HP**

FORK POSITIONING CARRIAGE (OUTRIGGERS DOWN)

| | |
|---|---|
| Capacity | 24,000 lbs |
| Max. lift height | 50' |
| Forward Reach | 36' |
| Frame leveling L/R | 0° |
| Weight | 56,500 lbs |
| Engine (Cummins 4.5L) | 173 hp (Tier 4F) |
| Fuel capacity | 72 gal |
| Tires | Foam Filled 16.00 x 25 - 28 |
| GPM | 49 |
| PSI | 4,300 |
| Hydraulic oil capacity | 58 gal |
| Length to fork face | 28' |
| Width | 102" |
| Height | 9' 6" |
| Wheel base | 148" |
| Ground clearance | 15" |
| Turning radius | 16' 8" |
| Warranty | Xtreme 10-5-2 |




## D CLASS CARRIAGE — XR3034 — ULTRA HIGH CAPACITY ROLLER BOOM

**30,000 LBS CAPACITY**
**34 FT LIFT HEIGHT**
**173 HP**

FORK POSITIONING CARRIAGE

| | |
|---|---|
| Capacity | 30,000 lbs |
| Max. lift height | 34' |
| Forward reach | 17' 6" |
| Frame leveling L/R | 8° |
| Weight | 63,100 lbs |
| Engine (Cummins 4.5L) | 173 hp (Tier 4F) |
| Fuel capacity | 72 gal |
| Tires | Foam Filled 16.00 x 25 - 28 |
| GPM | 49 |
| PSI | 4,500 |
| Hydraulic oil capacity | 58 gal |
| Length to fork face | 23' 11" |
| Width | 102" |
| Height | 9' 6" |
| Wheel base | 148" |
| Ground clearance | 15" |
| Turning radius | 16' 8" |
| Warranty | Xtreme 10-5-2 |




## E CLASS CARRIAGE — XR4030 — XTREME CAPACITY ROLLER BOOM

**40,000 LBS CAPACITY**
**30 FT LIFT HEIGHT**
**173 HP**

FORK POSITIONING CARRIAGE

| | |
|---|---|
| Capacity | 40,000 lbs |
| Max. lift height | 30' |
| Forward reach | 16' 4" |
| Frame leveling L/R | 3° |
| Weight | 63,000 lbs |
| Engine (Cummins 4.5L) | 173 hp (Tier 4F) |
| Fuel capacity | 72 gal |
| Tires | Foam Filled 23.5 R25 |
| GPM | 49 |
| PSI | 4,000 |
| Hydraulic oil capacity | 58 gal |
| Length to fork face | 22' 3" |
| Width | 118" |
| Height | 8' 10" |
| Wheel base | 148" |
| Ground clearance | 18" |
| Turning radius | 21' 11" |
| Warranty | Xtreme 10-5-2 |




## F CLASS CARRIAGE — XR7038 — ULTRA XTREME CAPACITY ROLLER BOOM

**70,000 LBS CAPACITY**
**38 FT LIFT HEIGHT**
**300 HP**

FORK POSITIONING CARRIAGE

| | |
|---|---|
| Capacity | 70,000 lbs |
| Max. lift height | 38' 2" |
| Forward reach | 22' |
| Frame leveling L/R | 7° |
| Weight | 115,000 lbs |
| Engine (Cummins 8L) | 300 hp (Tier 4F) |
| Fuel capacity | 150 gal |
| Tires | Foam Filled 29.5 R25 |
| GPM | 92 |
| PSI | 4,200 |
| Hydraulic oil capacity | 140 gal |
| Length to fork face | 27' 9" |
| Width | 135" |
| Height | 11' 7" |
| Wheel base | 188" |
| Ground clearance | 20.5" |
| Turning radius | 24' 6" |
| Warranty | Xtreme 10-5-2 |




# XTREME E-Z LOADER®

## CUSTOM DELIVERY TRUCK BEDS

- BULKHEAD BOLTED TO FRAME
- TRACTION PLATE FULL RAMP
- 17 SECOND RAMP DEPLOYMENT
- DOCK LOADING ABILITY

Legend for control valve

Optional Center Tie Downs

Optional hydraulic winch








| | E-Z12 | E-Z18 | E-Z24 |
|---|---|---|---|
| Bed capacity | 12,000 lbs | 18,000 lbs | 24,000 lbs |
| Dove tail load capacity | 8,000 lbs | 10,000 lbs | 15,000 lbs |
| Tow capacity | 5,000 lbs | 5,000 lbs | 10,000 lbs |
| Approximate G.V.W. | 26,000 lbs | 33,000 lbs | 48,000 lbs |
| Hydraulic pump P.T.O. | 14 GPM | 14 GPM | 14 GPM |
| Overall bed (W x L) | 6' 6" x 31' 3" | 6' 6" x 35' 3" | 6' 6" x 37' 5" |
| Main bed (W x L) | 6' 6" x 13' 5" | 6' 6" x 17' | 6' 6" x 17' 5" |
| Dove tail (W x L) | 6' 6" x 7' 5" | 6' 6" x 8' | 6' 6" x 10' |
| Flip tail (W x L) | 6' 6" x 4' 7" | 6' 6" x 5' 3" | 6' 6" x 5' 3" |
| Bulk head height | 9' | 5' | 5' |
| Cab to axle length | 11' 6" | 15' 5" | 13' 8" |
| Ramp length | 11' 11" | 13' 4" | 14' 9" |
| Bed height | 3' 5" | 3' 10" | 4' |
| Max dock height | 5' 5" | 5' 6" | 6' 5" |
| Ramp degree/% | 18/32% | 18/32% | 15/27% |
| Hitch receiver tube | 2" | 2" | 2" |
| Wood thickness | 1" | 1" | 1" |

**1 Year All Components / 3 Year Structural Warranty** (Bed only)
Note: Dimensions may change depending on truck manufacturer and model.

*www.xmfg.com/e-z-loaders*

# THE XTREME DIFFERENCE.




## WE DON'T DO AVERAGE.

At Xtreme Manufacturing, we build the largest range of heavy duty and high capacity telehandlers in North America. And we build them to outlast and outperform anything else in the industry — period. In fact, we set the standard for safety, productivity and reliability. Plus, we back all of our telehandlers up with an unmatched **10 year - 5 year - 2 year warranty.**

Downtime is the enemy of any jobsite. So, we design our machines to be super heavy duty and very low maintenance, greatly reducing downtime and lowering total ownership costs across the life of the machine. But we're not just tough, we're smart, too. Xtreme telehandlers feature cabs with 360-degree operator visibility, and intuitive controls so operators can keep one hand on the steering wheel at all times. Because safety is as important to us as strength. It's not about meeting industry standards, it's about setting them. Because we don't do average. **And that's what makes us different.**

*Standard features may vary across individual models. Consult your sales representative for more details.
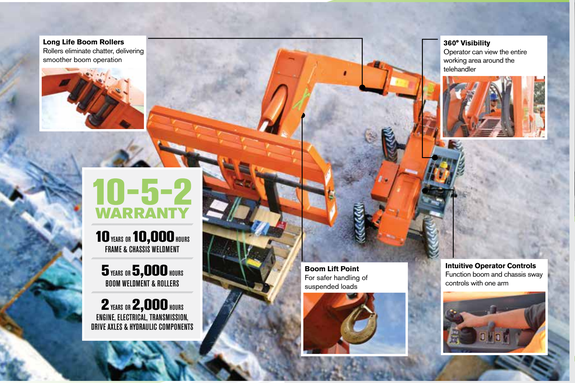
## STANDARD FEATURES*

- Long life boom rollers
- 360° visibility
- Boom lift point
- Intuitive operator controls
- Standard auxiliary hydraulics
- Solid steel plate chassis
- Steel dash
- Ductile steel manifold
- Easy cab mounted grab handles
- Reliable tier 4 compliant engines
- Master disconnect switch
- Axle mounted outriggers
- Wider outrigger stance
- Large cross section boom
- Easy tie downs
- Heavy duty pre-cleaner
- Additional high pressure hydraulic filter
- Direct engine/transmission connection
- Display screen
- Suspension seat
- Easy service access
- Protected lift & extend cylinders
- Steel hydraulic & fuel tanks
- Long life Lexan labels
- Heavy duty boom chains
- Suspended pedals
- Electrical ring terminals
- Large capacity fuel tanks
- Trunnion mounted sway cylinders
- Melonite pins
- Rear axle stabilization (RAS)
- Center mounted power train

# CABS, TIRES, CARRIAGES, & ATTACHMENTS

## CAB OPTIONS

All Xtreme telehandlers are available with a choice of open cab, enclosed cab, or enclosed cab with heat and air conditioning.

Please speak with your Xtreme sales representative for more details.

## TIRE OPTIONS

**G2 FOAM FILLED**
Offers great tread depth, the G2 tread clears debris for improved traction.

**E3 FOAM FILLED**
Provides great traction and stability when run either off-road or on hard surfaces.

**XTREME SOLID TIRE**
Xtreme solid tires provide a stable, cushioned, flat proof ride that is essential for both safety and productivity.

## FIXED CARRIAGE

Floating forks and adjustable side-to-side for efficient load entry and exit.

- Range from 48" to 96"

## SWING CARRIAGE

Allows for greater versatility in moving and placing materials in confined areas or when exact positioning is required.

- Range from 52" to 72"

## SIDE SHIFT CARRIAGE

Four-inch left and right carriage shift allows for precision load placement.

- Range from 48" to 96"

## ADJUSTABLE CARRIAGE

Fork positioning provides the ability to adjust the position of the forks, allowing the operator to handle a variety of loads without having to leave the cab.

- Range from 48" to 111"

## SIDE TILT CARRIAGE

Tilts loads from side-to-side and allows for minor lateral positioning of the load during final placement.

- Range from 48" to 72"

## PIPE & POLE GRAPPLE

Designed for handling multiple pipes or larger single pipe.

- Range from 72" to 96"
- Available with and without shoe

## PALLET FORK

Rugged fork design makes it easier to handle heavy palletized material.

## LUMBER FORK

Wide forks provide a larger surface area for stability when transporting larger materials.

## CUBING FORK

Allows operator to handle cubes of brick and block with ease.

## PERSONNEL PLATFORM

Extend the capabilities of your Xtreme telehandler by lifting personnel and materials.

- Range from 4'x4' to 8'x8'

## TRUSS BOOM

Allows operator to set trusses and wall sections for wood and steel building construction.

- Range from 3' to 15'
- Available with and without winch

## SLING MOUNT

Provides ability to handle suspended loads. Pick and tilt for precise load placement.

## PINTEL HOOK

Versatile tow point for movement of equipment and material.

## GENERAL PURPOSE BUCKET

Material bucket to carry loose dirt, materials and debris. The bucket can also be used for clean up around the job site.

- Range from 1.00yd to 2.00yd
- Available with or without bolt on cutting edge

## GRAPPLE BUCKET

Features a hydraulic grapple arm to secure bulky loads and assist in job site clean up.

## TIRE MANIPULATOR

Designed for the safe installation and removal of wheel assemblies from large construction and mining equipment, this fully integrated attachment utilizes Xtreme's existing in-cab controls for safe and seamless operation. The tire manipulator attachment is available to fit Xtreme telehandler models XR1055 and larger.

## ROTOBEC

This pipe and pole grapple is used for vertical and horizontal material placement. It is a safe and efficient alternative for handling installation of everything from utility poles to gas pipelines.

For more information, contact Xtreme:
**T: +1 (702) 636.2969**
**T: +1 (800) 494.1704** ***(toll-free)***
Request a quote online at ***www.xmfg.com***

Not all attachments are available for all models.
Please check with your Xtreme sales representative at time of ordering.

Xtreme telehandlers are proudly manufactured in Henderson, Nevada, USA, and are sold and serviced throughout the USA, Canada, Latin America, Australia, and beyond.

Learn more and request a quote online at **www.xmfg.com.**

MADE IN USA

XTREME MANUFACTURING

***www.xmfg.com***


**XTREME MANUFACTURING, LLC**

**8350 Eastgate Road, Henderson, NV 89015, USA**
**T: +1 (702) 636.2969**
**T: +1 (800) 494.1704** ***(toll-free)***




XR1055 XR1255 XR1455 XR1650 XR1850 XR2050 XR2550 XR3055 XR3555 XR4055 XR4555 XR5055 XR5555 XR6055 XR6555 XR7055

XTREME MANUFACTURING

# TELEHANDLERS

SPECIFICATIONS • FEATURES • ATTACHMENTS