





## SIMPLE & EFFECTIVE SECONDARY GUARDING

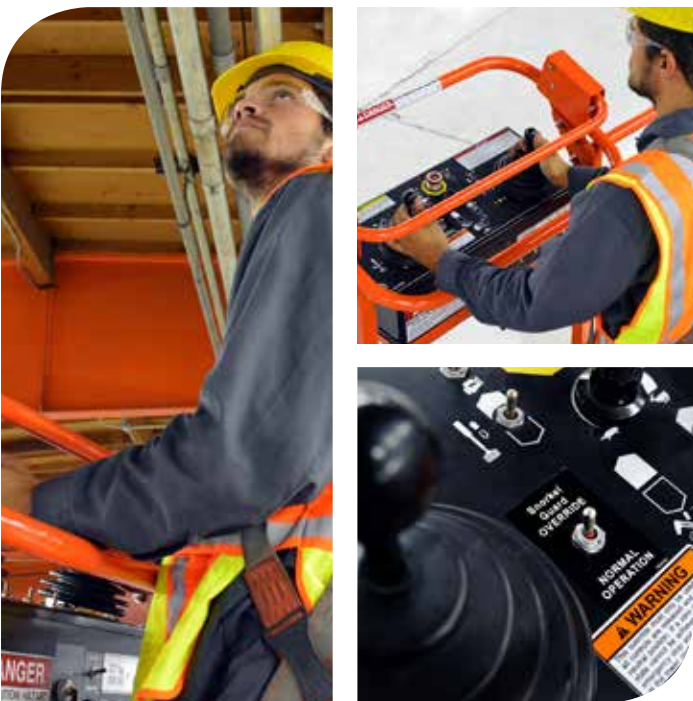

- Simple, mechanical system - no complexity
- Easy to service & maintain - no electronics
- Operator can override the system if needed
- Equipped as standard on new Snorkel booms

Snorkel Guard™ is a spring-loaded rail mounted above the platform controls, which stops machine operation when pressure is applied.

Now standard on all Snorkel booms with platform heights of 40ft (12.1m) and above. A retrofit kit is also available for most Snorkel booms in the field.

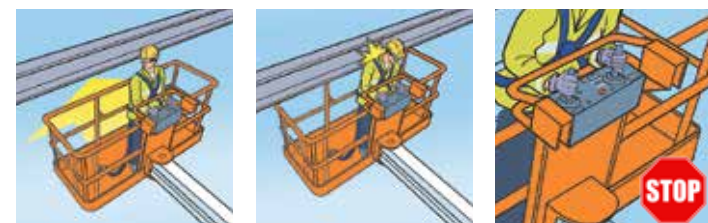

FOR MORE INFORMATION  
[www.snorkellifts.com](http://www.snorkellifts.com)

## TELESCOPIC BOOM LIFTS

### INTERNAL COMBUSTION ROUGH TERRAIN



#### Features

- Rugged all-terrain telescopic boom lifts
- 4-wheel drive for excellent rough terrain performance
- Available with and without a jib boom
- Ideal for both construction and industrial applications

Specifications	NEW 400S*	NEW 460SJ*
Max. working height	46' (14.2m)	52' (16.0m)
Max. platform height	40' (12.2m)	46' (14.0m)
Max. horizontal reach	33' (10.1m)	40' (12.2m)
Stowed length	24' 10" (7.57m)	28' 5" (8.6m)
Overall width	7' 10" (2.38m)	7' 10" (2.38m)
Stowed height	7' 11" (2.4m)	7' 11" (2.4m)
Platform capacity	600 lbs (272kg)	600 lbs (272kg)
Inside turning radius	5' 5" (1.65m)	5' 5" (1.65m)
Gradeability	50%	50%
Weight	14,550 lbs (6,599kg)	17,500 lbs (7,955kg)


\*Preliminary specifications - confirm at time of ordering.

Specifications	NEW 600S*	NEW 660SJ*
Max. working height	66' (20.3m)	72' (22.1m)
Max. platform height	60' (18.3m)	66' (20.1m)
Max. horizontal reach	52' 2" (15.9m)	59' (18.0m)
Stowed length	30' 2" (9.2m)	34' 5" (10.5m)
Overall width	7' 10" (2.38m)	7' 10" (2.38m)
Stowed height	8' 4" (2.5m)	8' 4" (2.5m)
Platform capacity	600 lbs (272kg)	600 lbs (272kg)
Inside turning radius	5' 5" (1.65m)	5' 5" (1.65m)
Gradeability	45%	43%
Weight	21,730 lbs (9,857kg)	28,850 lbs (13,006kg)

\*Preliminary specifications - confirm at time of ordering.

## TELESCOPIC BOOM LIFTS

### INTERNAL COMBUSTION ROUGH TERRAIN

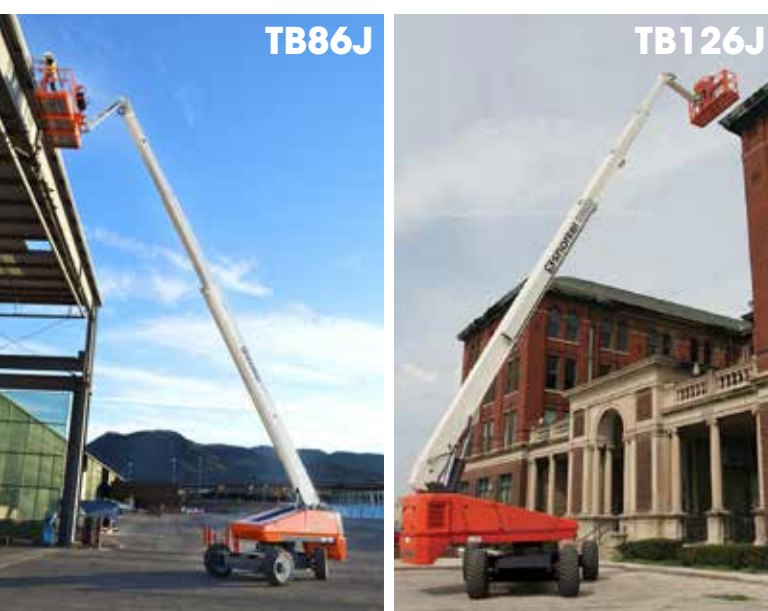

#### Features

- Powerful diesel powered telescopic boom lifts
- Available with and without a jib boom
- High torque 4-wheel drive system
- Ideal for construction applications

Specifications	TB80	TB86J
Max. working height	86' (26.4m)	92' (28.2m)
Max. platform height	80' (24.4m)	86' (26.2m)
Max. horizontal reach	71' 2" (21.7m)	78' 3" (23.9m)
Stowed length	38' 8" (11.8m)	42' 3" (12.9m)
Overall width	8' 6" (2.6m)	8' 6" (2.6m)
Stowed height	9' 6" (2.9m)	9' 6" (2.9m)
Platform capacity	500 lbs (227kg)	500 lbs (227kg)
Inside turning radius	7' 10" (2.4m)	7' 10" (2.4m)
Gradeability	40%	40%
Weight	36,332 lbs (16,480kg)	38,690 lbs (17,549kg)

Specifications	TB120	TB126J
Max. working height	126' (38.6m)	132' (40.4m)
Max. platform height	120' (36.6m)	126' (38.4m)
Max. horizontal reach	62' (18.9m)	62' 11" (19.2m)
Stowed length	42' 3" (12.9m)	44' 9" (13.6m)
Overall width	8' 6" (2.6m)	8' 6" (2.6m)
Stowed height	9' 10" (3.0m)	10' 5" (3.2m)
Platform capacity	500 lbs (227kg)	500 lbs (227kg)
Inside turning radius	21' 2.4" (6.5m)	21' 2.4" (6.5m)
Gradeability	30%	30%
Weight	39,500 lbs (17,917kg)	42,150 lbs (19,119kg)

## TOWABLE BOOM LIFTS

### TOWABLE BOOM LIFTS



#### Features

- Robust, reliable, and compact towable boom lifts
- Quick to set up and easy to operate
- Simple to service and maintain
- Available with a range of power sources

Specifications	TL37J
Max. working height	41' 9" (12.9m)
Max. platform height	35' 9" (10.9m)
Max. horizontal reach	18' 5" (5.6m)
Towing width	5' 3" (1.61m)
Towing length	20' 11" (6.4m)
Stowed height	6' 11" (2.1m)
Outrigger footprint	12' 9" x 10' 10" (3.9m x 3.3m)
Superstructure rotation	640° (non-continuous)
Platform capacity	475 lbs (215kg)
Weight	3,498 lbs (1,568kg)

Specifications	TL39	TL49J
Max. working height	43' 9" (13.5m)	54' 1" (16.7m)
Max. platform height	37' 9" (11.5m)	48' 1" (14.7m)
Max. horizontal reach	21' (6.4m)	27' 10" (8.5m)
Towing width	5' 3" (1.61m)	5' 8" (1.72m)
Towing length	15' 5" (4.7m)	23' 3" (7.1m)
Stowed height	6' 7" (2.01m)	7' 2" (2.16m)
Stabilizer footprint	13' 1" x 11' 10" (4.0m x 3.6m)	15' 9" x 15' 5" (4.8m x 4.7m)
Superstructure rotation	540° (non-continuous)	680° (non-continuous)
Platform capacity	475 lbs (215kg)	425 lbs (200kg)
Weight	3,263 lbs (1,480kg)	5,269 lbs (2,389kg)

## ACCESSORY PACKAGES

### CUSTOMIZE YOUR SNORKEL LIFT

Increase your productivity by customizing your Snorkel lift with a Snorkel **accessory package**. Designed for many applications and environments, Snorkel accessory packages help you to get the most from your Snorkel lift.

Snorkel **accessory packages** range from aircraft protection kits, to glazier packages and generators, plus a specially designed 'tunnel package' for the innovative Snorkel Speed Level lift, designed to make light work of tunnel construction and maintenance projects.

Model	Aircraft Package	Deluxe Aircraft Package	Cold Weather Package	Extreme Cold Weather Package	Light Package	Extreme Environment Package	Glazier Package	Tow Kit	12k Generator Package	12k Generator/Welder Package	Tunnel Package
<b>Telescopic Booms</b>											
400S	X	X	X	X	X	X	X	X	X	X	-
460SJ	X	X	X	X	X	X	X	X	X	X	-
600S	X	X	X	X	X	X	X	X	X	X	-
660SJ	X	X	X	X	X	X	X	X	X	X	-
TB80	-	-	X	X	X	X	X	X	X	X	-
TB86J	-	-	X	X	X	X	X	X	X	X	-
TB120	-	-	X	X	X	X	X	X	X	X	-
TB126J	-	-	X	X	X	X	X	X	X	X	-
<b>Articulated Booms</b>											
A46JE	X	X	-	-	-	-	-	-	-	-	-
A46JRT	X	X	X	X	X	-	-	-	-	-	-
AB60J	X	X	X	X	X	X	X	X	-	-	-
AB80J	X	X	X	X	X	X	X	X	X	X	-
AB85J	X	X	X	X	X	X	X	X	X	X	-
<b>Speed Level</b>											
SL26SL	-	-	-	-	-	-	-	-	-	-	X
SL30SL	-	-	-	-	-	-	-	-	-	-	X



\*Some Accessory Packages are not available for all models. See chart for availability or contact a Snorkel Customer Service Representative for more details at (785) 989-3000.

## ACCESSORY PACKAGES

### CUSTOMIZE YOUR SNORKEL LIFT



#### AIRCRAFT PACKAGE

- Bumpguard system
- Tow kit
- Swing gate
- Fall arrest protection



#### DELUXE AIRCRAFT PACKAGE

- Aircraft package
- Enhanced padded bumpguard



#### COLD WEATHER PACKAGE

- Block heater
- Hydraulic warm-up kit



#### EXTREME COLD WEATHER PACKAGE

- Cold weather package
- Battery blanket
- Synthetic oil



#### LIGHTS PACKAGE

- Platform lights
- Control panel
- Driving headlights



#### EXTREME ENVIRONMENT PACKAGE

- Sandblast protection kit
- Boom wiper seals
- Platform control box cover



#### GLAZIER PACKAGE

- Two trays with keeper pins
- Platform rail padding
- Straps with protectors
- Storage box



#### TOW KIT

- Tow bar
- Float valve
- Chain
- Steering link



#### 10K/12K GENERATOR PACKAGE

- 30A 208VAC 3-ph, 60Hz outlet
- 15A 208VAC 3-ph, 60Hz outlet
- 15A 120VAC 1-ph 60Hz outlet
- Platform welder bracket
- Hydraulic oil cooler (below 50°)



#### 12K GENERATOR/WELDER PACKAGE

- Lincoln V275-5 welder
- Hydraulic 208VAC 3-ph generator



#### TUNNEL PACKAGE





- 3.5kW hydraulic generator
- Work light package
- Driving light package
- Diesel scrubber
- Spark arrester
- Engine block heater & charger
- Air pre-cleaner

## EZ LOADER

### EZ LOADER CUSTOM DELIVERY TRUCK BEDS



- BULKHEAD BOLTED TO FRAME
- TRACTION PLATE FULL RAMP
- 17 SECOND RAMP DEPLOYMENT
- DOCK LOADING ABILITY

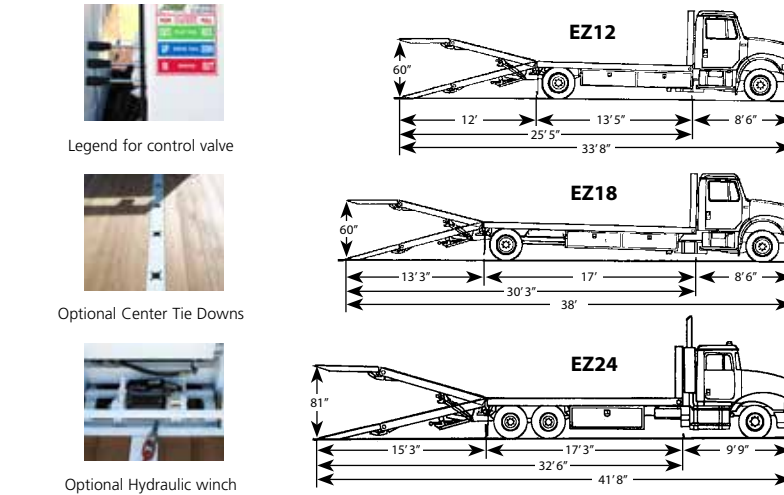

	EZ12	EZ18	EZ24
<b>CAPACITIES</b>			
Bed Capacity	12,000 lbs (5,443kg)	18,000 lbs (8,165kg)	24,000 lbs (10,886kg)
Dove Tail Load Capacity	8,000 lbs (3,628kg)	10,000 lbs (4,535kg)	15,000 lbs (6,803kg)
Tow Capacity	5,000 lbs (2,267kg)	5,000 lbs (2,267kg)	10,000 lbs (4,535kg)
Approximate G.V.W.	26,000 lbs (11,793kg)	33,000 lbs (14,968kg)	48,000 lbs (21,772kg)
Hydraulic Pump P.T.O.	14 GPM (53 LPM)	14 GPM (53 LPM)	14 GPM (53 LPM)
<b>DIMENSIONS</b>			
Overall Bed W/L	8'6" (2.6m) W x 21'3" (6.4m) L	8'6" (2.6m) W x 25'3" (7.6m) L	8'6" (2.6m) W x 27'6" (8.3m) L
Main Bed W/L	8'6" (2.6m) W x 13'5" (4.1m) L	8'6" (2.6m) W x 17' (5.1m) L	8'6" (2.6m) W x 17'3" (5.2m) L
Dove Tail W/L	8'6" (2.6m) W x 7'5" (2.2m) L	8'6" (2.6m) W x 8' (2.4m) L	8'6" (2.6m) W x 10' (3m) L
Flip Tail W/L	8'6" (2.6m) W x 4'7" (1.4m) L	8'6" (2.6m) W x 5'3" (1.6m) L	8'6" (2.6m) W x 5'3" (1.6m) L
Bulk Head Height	5' (1.52m)	5' (1.52m)	5' (1.52m)
Cab to Axle Length	11' 6" (3.5m)	15' 5" (4.69m)	13' 8" (4.16m)
Ramp Length	11' 11" (3.63m)	13' 4" (4.06m)	14' 9" (4.49m)
Bed Height	3' 5" (1.04m)	3' 10" (1.16m)	4' (1.21m)
Max Dock Height	5' 5" (1.65m)	5' 6" (1.67m)	6' 3" (1.9m)
Ramp Degree/%	18/32%	18/32%	15/27%
Hitch Receiver Tube	2" (50mm)	2" (50mm)	2" (50.8mm)
Wood Thickness	1" (25.4mm)	1" (25.4mm)	1" (25.4mm)
Warranty (Bed Only)	<b>1 Year All Components / 3 Year Structural</b>		

[www.snorkellifts.com/ezloader](http://www.snorkellifts.com/ezloader)

**snorkel**  
FOR MORE INFORMATION  
[www.snorkellifts.com](http://www.snorkellifts.com)

T: 785-989-3000

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.


MF0217





## NEW MATERIAL LIFTS

### PUSH AROUND MATERIAL LIFTS

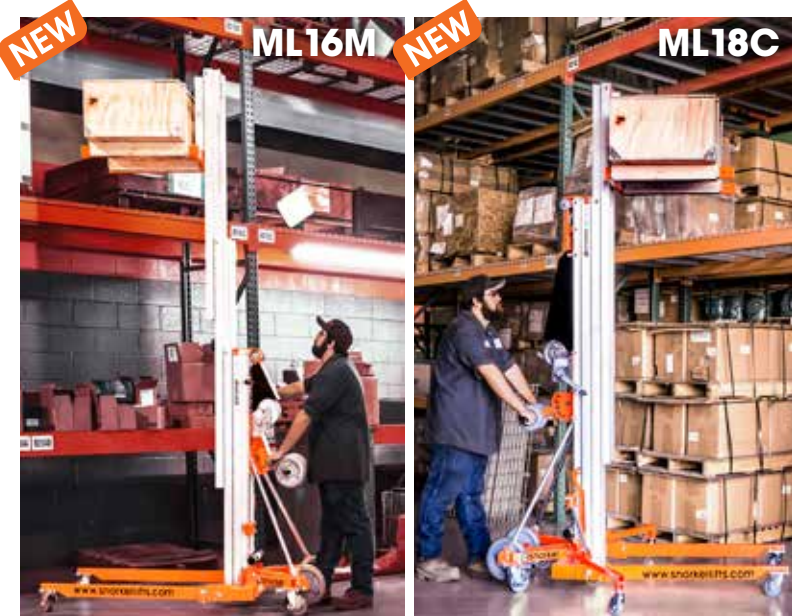

#### Features

- High specification material lifts
- Best-in-class load capacities
- Can pass through a standard doorway
- Dual handle, two-speed shift-on-the-fly winch

## SCISSOR LIFTS

### PUSH AROUND & SELF-PROPELLED MINI LIFTS



#### Features

- Lightweight push around and self-propelled mini scissor lifts
- Easily passes through a standard doorway
- Durable design for tough site conditions
- Proven productivity benefits over traditional low level access products

## SCISSOR LIFTS

### BATTERY ELECTRIC SLAB



#### Features

- Self-propelled electric slab scissor lifts
- Ideal for low level construction or maintenance applications
- Compact and nimble
- Easy to use and maintain

## SCISSOR LIFTS

### INTERNAL COMBUSTION ROUGH TERRAIN



#### Features

- Compact, rough terrain scissor lifts
- Excellent 4-wheel drive performance
- Roll-out deck extension for improved reach
- Bi-Energy (BE) version available

## SCISSOR LIFTS

### INTERNAL COMBUSTION ROUGH TERRAIN



#### Features

- Innovative 'Speed Level' lift
- Auto-levels without the need for outriggers
- Powerful 4-wheel drive for superb rough terrain capability
- Ideal for construction applications or working on compound slopes

## MAST LIFTS

### SELF-PROPELLED




#### Features

- Versatile electric mast lifts
- Ideal for multiple applications including retail, stockpicking & maintenance
- Highly maneuverable for use in confined spaces
- Easy to use and maintain

## MAST LIFTS

### PUSH AROUND

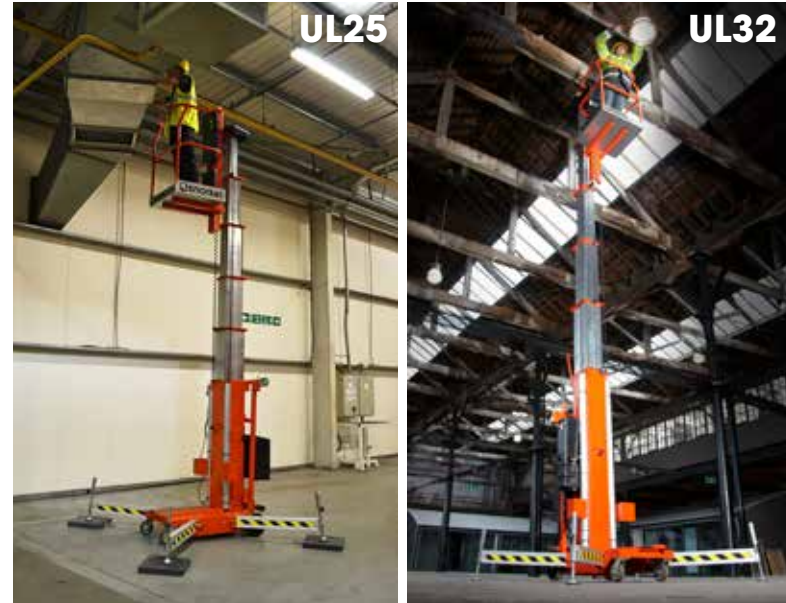

#### Features

- Easy to use push around mast lifts
- Patented Girder Lock mast design for stable working up to 46' (14.4m)
- Compact dimensions
- Passes easily through a standard doorway using built-in tilt-back system

## ARTICULATING BOOM LIFTS

### BATTERY ELECTRIC



#### Features

- Class leading electric articulating boom lifts
- Highly maneuverable with smooth proportional controls
- Superb working envelope with zero tailswing
- Suitable for indoor and outdoor use

## ARTICULATING BOOM LIFTS

### INTERNAL COMBUSTION ROUGH TERRAIN



#### Features

- Robust and reliable diesel rough terrain articulating boom lifts
- Powerful 4-wheel drive for superb rough terrain capability
- Simple to operate and maintain
- Ideal for both maintenance and construction applications

Specifications	NEW ML12M	NEW ML16M	NEW ML20M
Lift height – forks up	12' 6.5" (3.8m)	16' 1" (4.9m)	19' 8" (6.0m)
Lift height – forks down	10' 10" (3.3m)	14' 5" (4.4m)	17' 11" (5.5m)
Stowed width	30.5" (0.77m)	30.5" (0.77m)	30.5" (0.77m)
Stabilizer width	64" (1.63m)	64" (1.63m)	64" (1.63m)
Stowed length	33" (0.84m)	34.5" (0.88m)	36" (0.91m)
Operating length	5' 8" (1.72m)	6' 1" (1.85m)	6' 11" (2.1m)
Stowed height	5' 3" (1.59m)	5' 3" (1.59m)	5' 3" (1.59m)
Fork width (outside)	23" (0.58m)	23" (0.58m)	23" (0.58m)
Max. load capacity*	700 lbs (318kg)	650 lbs (295kg)	600 lbs (272kg)
Weight	265 lbs (120kg)	298 lbs (135kg)	332 lbs (151kg)

\*14 in. (0.36m) load center

Specifications	NEW ML12C	NEW ML18C	NEW ML24C
Lift height – forks up	13' 3" (4.0m)	18' 6" (5.6m)	24' 4" (7.4m)
Lift height – forks down	11' 6" (3.5m)	16' 10" (5.1m)	22' 7" (6.9m)
Stowed width	30.5" (0.77m)	30.5" (0.77m)	30.5" (0.77m)
Stabilizer width	64" (1.63m)	64" (1.63m)	64" (1.63m)
Stowed length	2' 9" (0.85m)	2' 9" (0.85m)	2' 9" (0.85m)
Operating length	5' 2" (1.75m)	6' 1" (1.86m)	6' 9" (2.06m)
Stowed height	7' 2" (2.2m)	7' 2" (2.2m)	7' 2" (2.2m)
Fork width (outside)	23" (0.58m)	23" (0.58m)	23" (0.58m)
Max. load capacity*	750 lbs (340kg)	700 lbs (318kg)	650 lbs (295kg)
Weight	245 lbs (111kg)	310 lbs (141kg)	358 lbs (162kg)

\*14 in. (0.36m) load center

Specifications	S3006P	S3008P	S3010P
Max. working height	12' 6" (4.0m)	14' 2" (4.5m)	15' 10" (5.0m)
Max. platform height	6' 6" (2.0m)	8' 2" (2.5m)	9' 10" (3.0m)
Overall length	3' 11" (1.19m)	3' 11" (1.19m)	3' 11" (1.19m)
Overall width	2' 3" (0.68m)	2' 3" (0.68m)	2' 3" (0.68m)
Stowed height	5' 6" (1.7m)	5' 10" (1.8m)	5' 10" (1.8m)
Platform capacity	529 lbs (240kg)	500 lbs (227kg)	430 lbs (195kg)
Max. wind speed	0 mph (0m/s)	0 mph (0m/s)	0 mph (0m/s)
Raise/lower time	8/14 seconds	13/17 seconds	19/26 seconds
Power source	12 volt DC battery	12 volt DC battery	12 volt DC battery
Weight	682 lbs (310kg)	770 lbs (350kg)	815 lbs (370kg)

Specifications	S3010E
Max. working height	15' 11" (5.0m)
Max. platform height	9' 11" (3.0m)
Overall length	49.6" (1.26m)
Overall width	30.3" (0.77m)
Stowed height	5' 11" (1.8m)
Ground clearance	2.3" (58mm)
Platform capacity	500 lbs (227kg)
Inside turning radius	0" (0m)
Gradeability	25%
Weight	1,091 lbs (495kg)

Specifications	S3215E	S3219E	S3220E
Max. working height	21' (6.6m)	25' (7.79m)	26' (8.1m)
Max. platform height	15' (4.6m)	19' (5.79m)	20' (6.1m)
Overall length	70.2" (1.78m)	70.2" (1.78m)	90.6" (2.3m)
Overall width	32" (0.81m)	32" (0.81m)	32" (0.81m)
Stowed height	75.25" (1.91m)	78.75" (2.0m)	83" (2.11m)
Ground clearance	2.5" (63mm)	2.5" (63mm)	3" (76mm)
Platform capacity	600 lbs (272kg)	550 lbs (250kg)	900 lbs (408kg)
Inside turning radius	4" (0.1m)	4" (0.1m)	30" (0.76m)
Gradeability	25%	25%	25%
Weight	2,730 lbs (1,238kg)	2,900 lbs (1,315kg)	4,500 lbs (2,045kg)

Specifications	S3226E	S4726E	S4732E
Max. working height	32' (9.9m)	32' (9.9m)	38' (11.8m)
Max. platform height	26' (7.9m)	26' (7.9m)	32' (9.8m)
Overall length	90.6" (2.3m)	90.6" (2.3m)	90.6" (2.3m)
Overall width	32" (0.81m)	47" (1.19m)	47" (1.19m)
Stowed height	90.5" (2.3m)	90.5" (2.3m)	95" (2.41m)
Ground clearance	3" (76mm)	3" (76mm)	3" (76mm)
Platform capacity	500 lbs (227kg)	1,000 lbs (454kg)	700 lbs (317kg)
Inside turning radius	30" (0.76m)	10" (0.25m)	10" (0.25m)
Gradeability	25%	25%	25%
Weight	5,500 lbs (2,500kg)	4,750 lbs (2,154kg)	5,700 lbs (2,585kg)

Specifications	S2770RT	S3370RT	S3970RT
Max. working height	33' (10.23m)	39' (12.1m)	45' (13.9m)
Max. platform height	27' (8.23m)	33' (10.1m)	39' (11.9m)
Overall length	11' (3.4m)	11' (3.4m)	11' (3.4m)
Overall width	5' 10" (1.8m)	5' 10" (1.8m)	5' 10" (1.8m)
Stowed height	8' 6" (2.59m)	9' (2.7m)	9' 8" (2.95m)
Ground clearance	13" (330mm)	13" (330mm)	13" (330mm)
Platform capacity	1,250 lbs (580kg)	1,000 lbs (450kg)	771 lbs (350kg)
Inside turning radius	8" (2.44m)	8" (2.44m)	8" (2.44m)
Gradeability	35%	35%	30%
Weight	6,172 lbs (2,800kg)	7,980 lbs (3,620kg)	8,355 lbs (3,790kg)

Specifications	S2770BE	S3370BE	S3970BE
Max. working height	33' (10.23m)	39' (12.1m)	45' (13.9m)
Max. platform height	27' (8.23m)	33' (10.1m)	39' (11.9m)
Overall length	11' (3.4m)	11' (3.4m)	11' (3.4m)
Overall width	5' 10" (1.8m)	5' 10" (1.8m)	5' 10" (1.8m)
Stowed height	8' 6" (2.59m)	9' (2.7m)	9' 8" (2.95m)
Ground clearance	13" (330mm)	13" (330mm)	13" (330mm)
Platform capacity	1,250 lbs (580kg)	1,000 lbs (450kg)	771 lbs (350kg)
Inside turning radius	8" (2.44m)	8" (2.44m)	8" (2.44m)
Gradeability (engine)	35%	30%	30%
Weight	6,834 lbs (3,100kg)	8,642 lbs (3,920kg)	9,017 lbs (4,090kg)

Specifications	SL26SL
Max. working height	31' 6" (10.0m)
Max. platform height	25' 6" (8.0m)
Overall length	12' 5" (3.79m)
Overall width	7' (2.13m)
Stowed height	8' 6" (2.6m)
Ground clearance (axle)	7.6" (193mm)
Platform capacity	1,500 lbs (680kg)
Inside turning radius	12' 10" (3.9m)
Gradeability	50%
Weight	7,826 lbs (3,550kg)

Specifications	SL30SL
Max. working height	35' 4" (11.0m)
Max. platform height	29' 4" (9.0m)
Overall length	14' 1" (4.3m)
Overall width	7' (2.13m)
Stowed height	8' 6" (2.6m)
Ground clearance (axle)	7.6" (193mm)
Platform capacity	1,300 lbs (590kg)
Inside turning radius	12' 10" (3.9m)
Gradeability	50%
Weight	7,495 lbs (3,400kg)

Specifications	NEW TM12E	NEW TM16E*
Max. working height	18' (5.65m)	22' (6.87m)
Max. platform height	12' (3.65m)	16' (4.87m)
Overall length	4' 6" (1.37m)	4' 6" (1.37m)
Overall width	2' 6" (0.76m)	2' 6" (0.76m)
Stowed height	5' 6" (1.67m)	6' 6" (1.98m)
Ground clearance	3" (76mm)	3" (76mm)
Platform capacity	500 lbs (227kg)	500 lbs (227kg)
Inside turning radius	0" (0m)	0" (0m)
Gradeability	30%	30%
Weight	1,950 lbs (884kg)	2,360 lbs (1,070kg)

\*Preliminary specifications - confirm at time of ordering.

Specifications	MB20J	MB26J
Max. working height	26' (8.1m)	31' 6" (9.8m)
Max. platform height	20' (6.1m)	25' 6" (7.8m)
Overall length	7' 11" (2.41m)	9' 2" (2.8m)
Overall width	32" (0.81m)	39" (1.0m)
Stowed height	6' 6" (1.98m)	6' 6" (1.98m)
Platform capacity	475 lbs (215kg)	475 lbs (215kg)
Jib length / arc	3' 4" (1.02m) / 130°	4' 7" (1.4m) / 130°
Inside turning radius	11" (0.3m)	11" (0.3m)
Gradeability	50%	25%
Weight	6,675 lbs (3,028kg)	7,000 lbs (3,175kg)

Specifications	UL25	UL32
Max. working height	30' 11" (9.6m)	37' 9" (11.7m)
Max. platform height	24' 11" (7.6m)	31' 9" (9.7m)
Overall length	4' 2" (1.26m)	4' 4" (1.32m)
Overall width	2' 5" (0.74m)	2' 5" (0.74m)
Stowed height	6' 6" (1.99m)	8' 3" (2.51m)
Stabilizer footprint	6' 10" x 6' 6" (2.06m x 1.99m)	6' 10" x 6' 6" (2.06m x 1.99m)
Platform capacity	350 lbs (159kg)	300 lbs (136kg)
Max. wind speed	0 mph (0m/s)	0 mph (0m/s)
Weight (AC)	859 lbs (390kg)	959 lbs (435kg)
Weight (DC)	926 lbs (420kg)	1,025 lbs (465kg)

Specifications	UL40
Max. working height	46' (14.1m)
Max. platform height	40' (12.1m)
Overall length	4' 4" (1.32m)
Overall width	2' 5" (0.74m)
Stowed height	9' 6" (2.90m)
Stabilizer footprint	9' 8" x 9' 4" (2.95m x 2.85m)
Platform capacity	300 lbs (136kg)
Max. wind speed	0 mph (0m/s)
Weight (AC)	1,036 lbs (470kg)
Weight (DC)	1,102 lbs (500kg)

Specifications	A38E
Max. working height	43' 7" (13.5m)
Max. platform height	37' 7" (11.5m)
Max. horizontal reach	18' 4" (5.9m)
Overall length	13' 4.8" (4.1m)
Overall width	4' 11" (1.49m)
Stowed height	6' 8" (2.0m)
Platform capacity	475 lbs (215kg)
Inside turning radius	3' 8" (1.12m)
Gradeability	36%
Weight	9,140 lbs (4,146kg)

Specifications	A46JE
Max. working height	52' 3" (16.0m)
Max. platform height	46' 3" (14.0m)
Max. horizontal reach	24' 11" (7.6m)
Jib length / arc	5' (1.5m) / 140°
Platform capacity	500 lbs (227kg)
Overall width	5' 8" (1.7m)
Platform capacity	500 lbs (227kg)
Inside turning radius	2' (0.61m)
Gradeability	40%
Weight	15,100 lbs (6,850kg)

Specifications	A46JRT	AB60J
Max. working height	52' 11" (16.3m)	66' (20.3m)
Max. platform height	46' 11" (14.3m)	60' (18.3m)
Max. horizontal reach	24' 11" (7.6m)	43' 1" (13.1m)
Jib length / arc	5' (1.5m) / 140°	6' (1.8m) / 75°
Platform capacity	500 lbs (227kg)	500 lbs (227kg)
Overall length	18' 4" (5.6m)	29' 2" (8.87m)
Overall width	6' 10" (2.1m)	7' 11.5" (2.4m)
Stowed height	7' 2" (2.16m)	8' 3" (2.51m)
Gradeability	40%	30%
Weight	16,620 lbs (7,540kg)	24,800 lbs (11,249kg)

Specifications	AB80J	AB85J
Max. working height	85' 11" (26.3m)	90' 6" (27.7m)
Max. platform height	79' 11" (24.3m)	84' 6" (25.7m)
Max. horizontal reach	59' 5" (18.1m)	61' 11" (18.8m)
Jib length / arc	5' (1.5m) / 140°	6' 6" (2.0m) / 135°
Platform capacity	500 lbs (227kg)	500 lbs (227kg)
Overall length	32' 2" (9.8m)	41' 2" (12.5m)
Overall width	8' 6" (2.6m)	8' 6" (2.6m)
Stowed height	9' 10" (3.0m)	9' 10" (3.0m)
Gradeability	30%	40%
Weight	36,800 lbs (16,692kg)	38,580 lbs (17,500kg)