

TL39

TOWABLE BOOM LIFT



- Tough yet compact trailer mounted boom lift
- Easy to set-up hydraulic outriggers
- Maneuverable articulating/telescopic boom
- Smooth, easy to operate controls
- Simple to maintain

 **snorkel**[™]
www.snorkellifts.com

TOWABLE BOOM LIFT

TL39




DIMENSIONS	TL39
Max. working height	13.5m
Max. platform height	11.5m
Max. working outreach	6.4m
Platform width (C)	1.24m
Platform depth (D)	0.75m
Outrigger footprint (A x B)	4.0m x 3.6m
Towing width (E)	1.61m
Towing length (F)	5.1m
Stowed height (G)	2.01m

PERFORMANCE	
Platform capacity (SWL)	215kg
Max. wind speed	12.5m/s
Turret rotation (non-continuous)	540°
Tires	185R14C
Controls	electric over hydraulic, variable speed

POWER	
Power source	24V DC battery
Power options	gasoline; bi-energy; AC power, diesel

WEIGHT	
Weight (DC battery)	1,680kg

WORKING ENVELOPE

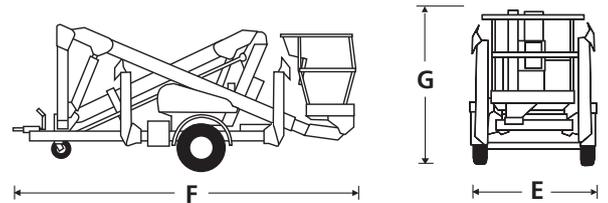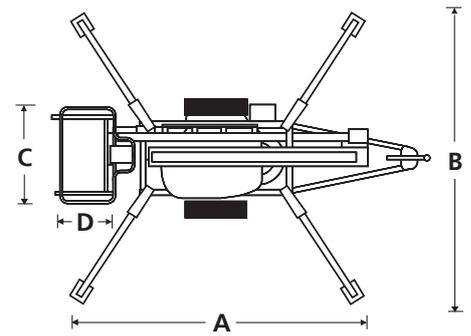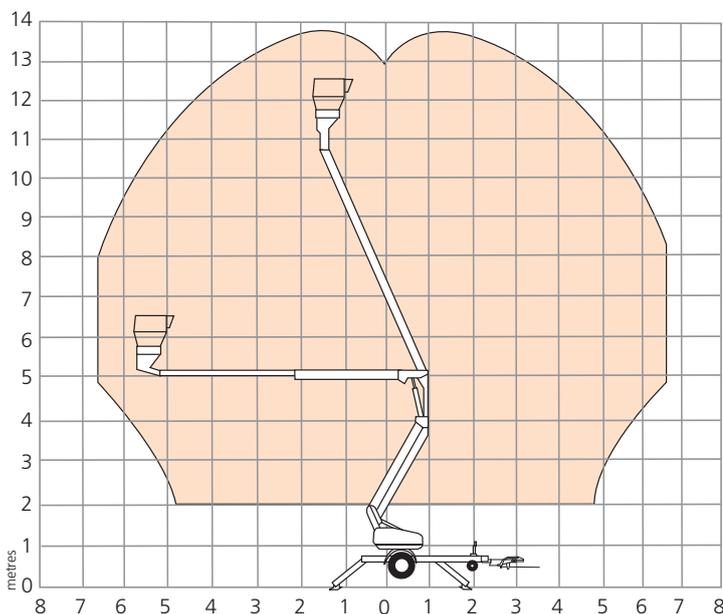

STANDARD FEATURES

- Articulating / telescopic boom configuration
- Auto-level hydraulic stabilizers with LED indicators
- Electric controls at platform
- Power line to platform
- Hydraulic platform rotate
- Integral road lighting board
- Integrated automatic battery charger 110V-230V
- Dual lanyard attachment points
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

OPTIONS

- Special paint colors
- Work lights in platform
- Airline to platform
- Flashing amber light
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil
- Snorkel OnSite™ telematics

snorkel www.snorkellifts.com

P.O. Box 1160
 St. Joseph, MO 64502-1160, USA
 Tel: 1 (785) 989-3000
 Toll-free: 1 (800) 255-0317
 Fax: 1 (785) 989-3070
 Email: sales.usa@snorkellifts.com